




Widgerm Lighting Ltd.
匯湛照明有限公司

LED Spot Lighting Series-New Wings



Applicable place:

Hotels, shopping malls, bars, exhibition centers, senior stores, entertainment venues, museums, indoor business, leisure clubs and other lighting

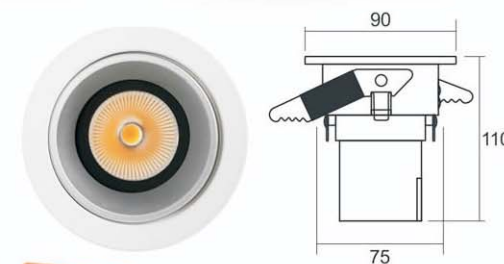

∠15°

适用: 长柱物体照射效果

∠24°

适用: 背景墙洗墙效果

∠36°

适用: 特殊场景洗墙效果

7W

Model No	ET135-7W
Input Voltage (V)	AC85-265V
Frequency (Hz)	50/60Hz
Power (W)	COB 7W
Beam Angle	36°
Light Flux:	90-110Lm/W
Color Temperature	3000K, 4000K, 6000K
Color Render Index	≥80
Diameter	Ø90xH110mm
Hole cut	Ø75mm



Widegerm Lighting Ltd.

匯湛照明有限公司



Square Trim
-Fixed Angle



Trimless



Round Trim



Square Trim-Adjustable

10W



Model No LD135-10W Adjustable
 Input Voltage (V) AC85-265V
 Frequency (Hz) 50/60Hz
 Power (W) COB 10W
 Beam Angle 10°/24°/38°
 Light Flux: 90-110Lm/W
 Color Temperature 3000K, 4000K, 5000K
 Color Render Index ≥80
 Diameter Ø85xH100mm
 Hole cut Ø75mm

10W



Model No LD137-10W Adjustable
 Input Voltage (V) AC85-265V
 Frequency (Hz) 50/60Hz
 Power (W) COB 10W
 Beam Angle 10°/24°/38°
 Light Flux: 90-110Lm/W
 Color Temperature 3000K, 4000K, 5000K
 Color Render Index ≥80
 Diameter 85x85xH100mm
 Hole cut Ø75mm

10W



Model No LD136-10W Fixed Angle
 Input Voltage (V) AC85-265V
 Frequency (Hz) 50/60Hz
 Power (W) COB 10W
 Beam Angle 10°/24°/38°
 Light Flux: 90-110Lm/W
 Color Temperature 3000K, 4000K, 5000K
 Color Render Index ≥80
 Diameter Ø85xH100mm
 Hole cut Ø75mm

10W



Model No LD138-10W Trimless
 Input Voltage (V) AC85-265V
 Frequency (Hz) 50/60Hz
 Power (W) COB 10W
 Beam Angle 10°/24°/38°
 Light Flux: 90-110Lm/W
 Color Temperature 3000K, 4000K, 5000K
 Color Render Index ≥80
 Diameter Ø75xH102mm
 Hole cut Ø75mm



Solderless COB Connector




Osram Basic Core



Philips SLM C




10W

Model No LD414P-10W
Power(Wattage) COB 10W
Driver Philips 250mA
Lumen out put 1000lm
Beam Angle 11°
Color Temperature 3000K、3500K、4000K、5000K
Color Render Index ≥80/≥90
Outer Diameter Ø90×H42
Out Cut  Ø70mm




30W

Model No LD714P-30W
Power(Wattage) COB 10W
Driver Philips 700mA
Lumen out put 3000lm
Beam Angle 24°
Color Temperature 3000K、3500K、4000K、5000K
Color Render Index ≥80/≥90
Outer Diameter Ø225×H100
Out Cut  Ø200mm




15W

Model No LD514P-15W
Power(Wattage) COB 15W
Driver Philips 350mA
Lumen out put 1500lm
Beam Angle 17°
Color Temperature 3000K、3500K、4000K、5000K
Color Render Index ≥80/≥90
Outer Diameter Ø120×H62
Out Cut  Ø100mm



44W

Model No LD814P-44W
Power(Wattage) COB 44W
Driver Philips 1050mA
Lumen out put 4400lm
Beam Angle 24°
Color Temperature 3000K、3500K、4000K、5000K
Color Render Index ≥80/≥90
Outer Diameter Ø280×H100
Out Cut  Ø260mm




20W

Model No LD614P-20W
Power(Wattage) COB 20W
Driver Philips 500mA
Lumen out put 2000lm
Beam Angle 24°
Color Temperature 3000K、3500K、4000K、5000K
Color Render Index ≥80/≥90
Outer Diameter Ø165×H70
Out Cut  Ø140mm



60W


Model No LD914P-60W
Power(Wattage) COB 60W
Driver Osram 1400mA
Lumen out put 6000lm
Beam Angle 24°
Color Temperature 3000K、3500K、4000K、5000K
Color Render Index ≥80/≥90
Outer Diameter Ø300×H100
Out Cut  Ø280mm






Widegerm Lighting Ltd.
匯湛照明有限公司


SUPER SLIM LED Panel Light Series

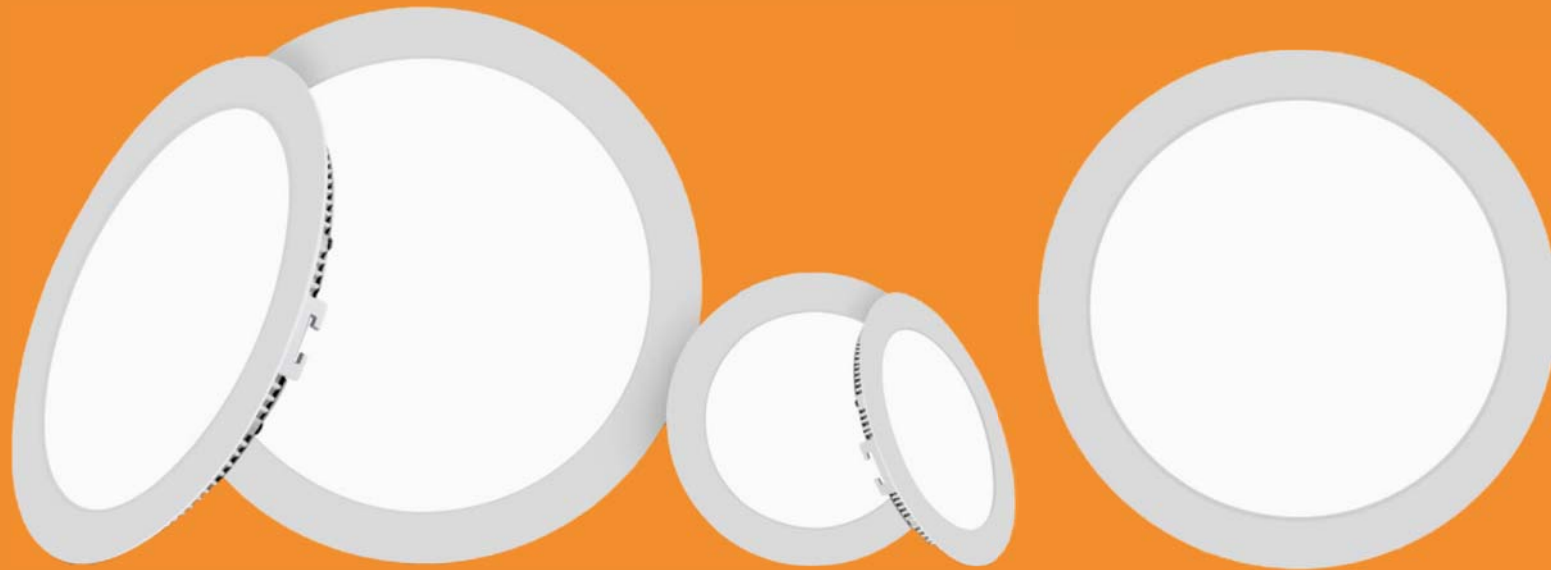

Model No	EB940-3R
Input Voltage(V)	AC85-265V
Frequency(Hz)	50/60Hz
Power(W)	SMD2835 3W
Beam Angle	120°
Light Flux	90-110Lm/W
Color Temperature	3000K、4000K、6000K
Color Render Index	≥80



3W SMD2835 SURFACE

Diameter Ø85 × H20
Hole Cut  Ø75mm




Widegerm Lighting Ltd.

匯湛照明有限公司



Model No EB940-6R
 Input Voltage (V) AC85-265V
 Frequency (Hz) 50/60Hz
 Power (W) SMD2835 6W
 Beam Angle 120°
 Light Flux: 90-110Lm/W
 Color Temperature 3000K, 4000K, 6000K
 Color Render Index ≥80




6W SMD2835

Diameter Ø120xH20mm
 Hole cut Ø105mm



Model No EB940-12R
 Input Voltage (V) AC85-265V
 Frequency (Hz) 50/60Hz
 Power (W) SMD2835 12W
 Beam Angle 120°
 Light Flux: 90-110Lm/W
 Color Temperature 3000K, 4000K, 6000K
 Color Render Index ≥80




12W SMD2835

Diameter Ø170xH20mm
 Hole cut Ø155mm



Model No EB940-18R
 Input Voltage (V) AC85-265V
 Frequency (Hz) 50/60Hz
 Power (W) SMD2835 18W
 Beam Angle 120°
 Light Flux: 90-110Lm/W
 Color Temperature 3000K, 4000K, 6000K
 Color Render Index ≥80




18W SMD2835

Diameter Ø225xH20mm
 Hole cut Ø205mm



Model No EB940-24R
 Input Voltage (V) AC85-265V
 Frequency (Hz) 50/60Hz
 Power (W) SMD2835 24W
 Beam Angle 120°
 Light Flux: 90-110Lm/W
 Color Temperature 3000K, 4000K, 6000K
 Color Render Index ≥80




24W SMD2835


Diameter Ø300xH20mm
 Hole cut Ø285mm



SURFACE LED Panel Light Series

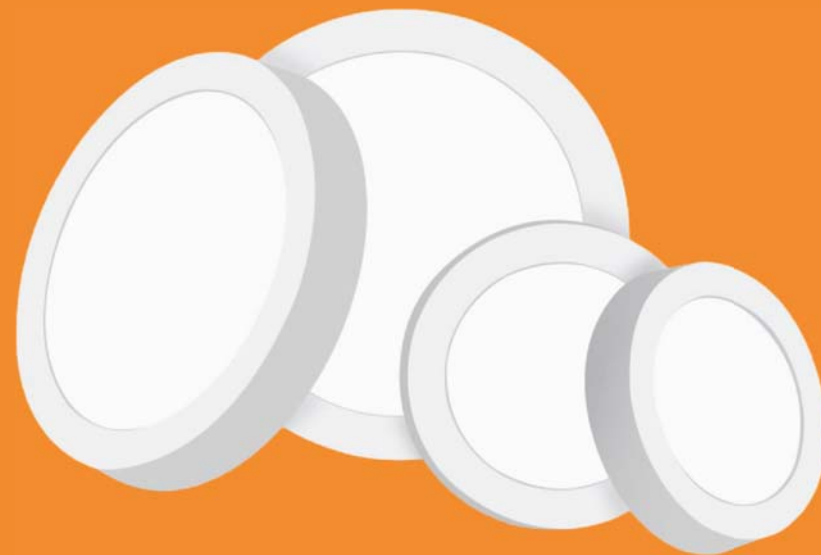


6W SMD2835 SURFACE




Model No	EB940-6RS
Input Voltage(V)	AC85-265V
Frequency(Hz)	50/60Hz
Power(W)	SMD2835 6W
Beam Angle	120°
Light Flux	90-110Lm/W
Color Temperature	3000K、4000K、6000K
Color Render Index	≥80
Diameter	Ø120×H35mm

18W SMD2835 SURFACE




Model No	EB940-18RS
Input Voltage(V)	AC85-265V
Frequency(Hz)	50/60Hz
Power(W)	SMD2835 18W
Beam Angle	120°
Light Flux	90-110Lm/W
Color Temperature	3000K、4000K、6000K
Color Render Index	≥80
Diameter	Ø225×H35mm

12W SMD2835 SURFACE



Model No	EB940-12RS
Input Voltage(V)	AC85-265V
Frequency(Hz)	50/60Hz
Power(W)	SMD2835 12W
Beam Angle	120°
Light Flux	90-110Lm/W
Color Temperature	3000K、4000K、6000K
Color Render Index	≥80
Diameter	Ø170×H35mm

24W SMD2835 SURFACE



Model No	EB940-24RS
Input Voltage(V)	AC85-265V
Frequency(Hz)	50/60Hz
Power(W)	SMD2835 24W
Beam Angle	120°
Light Flux	90-110Lm/W
Color Temperature	3000K、4000K、6000K
Color Render Index	≥80
Diameter	Ø300×H35mm




Widegerm Lighting Ltd.
匯湛照明有限公司

SUPER SLIM LED Panel Light Series



Model No	EB940-3S
Input Voltage(V)	AC85-265V
Frequency(Hz)	50/60Hz
Power(W)	SMD2835 3W
Beam Angle	120°
Light Flux	90-110Lm/W
Color Temperature	3000K、4000K、6000K
Color Render Index	≥80



3W SMD2835 **SURFACE**

Diameter $\varnothing 85 \times 85 \times H20\text{mm}$
Hole Cut $\varnothing 75 \times 75\text{mm}$




Widegerm Lighting Ltd.

匯湛照明有限公司



Model No EB940-6S
 Input Voltage (V) AC85-265V
 Frequency (Hz) 50/60Hz
 Power (W) SMD2835 6W
 Beam Angle 120°
 Light Flux: 90-110Lm/W
 Color Temperature 3000K, 4000K, 6000K
 Color Render Index ≥ 80




6W SMD2835

Diameter $\square 120 \times 120 \times H20 \text{mm}$
 Hole cut $\square 105 \times 105 \text{mm}$



Model No EB940-12S
 Input Voltage (V) AC85-265V
 Frequency (Hz) 50/60Hz
 Power (W) SMD2835 12W
 Beam Angle 120°
 Light Flux: 90-110Lm/W
 Color Temperature 3000K, 4000K, 6000K
 Color Render Index ≥ 80




12W SMD2835

Diameter $\square 170 \times 170 \times H20 \text{mm}$
 Hole cut $\square 155 \times 155 \text{mm}$




Model No EB940-18S
 Input Voltage (V) AC85-265V
 Frequency (Hz) 50/60Hz
 Power (W) SMD2835 18W
 Beam Angle 120°
 Light Flux: 90-110Lm/W
 Color Temperature 3000K, 4000K, 6000K
 Color Render Index ≥ 80




18W SMD2835

Diameter $\square 225 \times 225 \times H20 \text{mm}$
 Hole cut $\square 205 \times 205 \text{mm}$

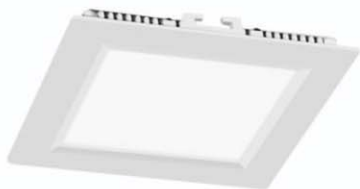

Model No EB940-24S
 Input Voltage (V) AC85-265V
 Frequency (Hz) 50/60Hz
 Power (W) SMD2835 24W
 Beam Angle 120°
 Light Flux: 90-110Lm/W
 Color Temperature 3000K, 4000K, 6000K
 Color Render Index ≥ 80



24W SMD2835


Diameter $\square 300 \times 300 \times H20 \text{mm}$
 Hole cut $\square 285 \times 285 \text{mm}$



SURFACE LED Panel Light Series




6W SMD2835 SURFACE

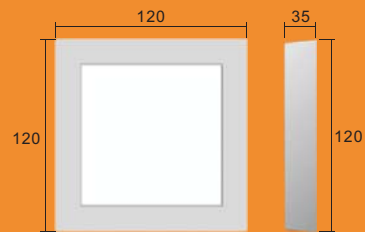


Model No EB940-6SS
Input Voltage(V) AC85-265V
Frequency(Hz) 50/60Hz
Power(W) SMD2835 6W
Beam Angle 120°
Light Flux 90-110Lm/W
Color Temperature 3000K、4000K、6000K
Color Render Index ≥80
Diameter □120×120×H35mm

18W SMD2835 SURFACE

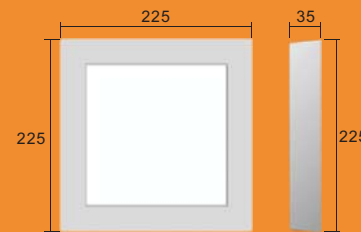


Model No EB940-18SS
Input Voltage(V) AC85-265V
Frequency(Hz) 50/60Hz
Power(W) SMD2835 18W
Beam Angle 120°
Light Flux 90-110Lm/W
Color Temperature 3000K、4000K、6000K
Color Render Index ≥80
Diameter □225×225×H35mm

12W SMD2835 SURFACE

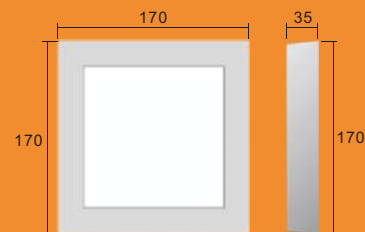

Model No EB940-12SS
Input Voltage(V) AC85-265V
Frequency(Hz) 50/60Hz
Power(W) SMD2835 12W
Beam Angle 120°
Light Flux 90-110Lm/W
Color Temperature 3000K、4000K、6000K
Color Render Index ≥80
Diameter □170×170×H35mm

24W SMD2835 SURFACE

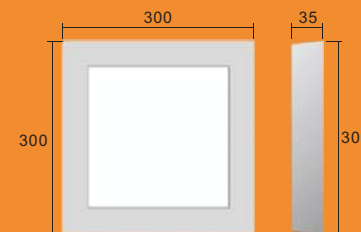


Model No EB940-24SS
Input Voltage(V) AC85-265V
Frequency(Hz) 50/60Hz
Power(W) SMD2835 24W
Beam Angle 120°
Light Flux 90-110Lm/W
Color Temperature 3000K、4000K、6000K
Color Render Index ≥80
Diameter □300×300×H35mm



Widegerm Lighting Ltd.
匯湛照明有限公司

BACKLITE LED Panel Light Series

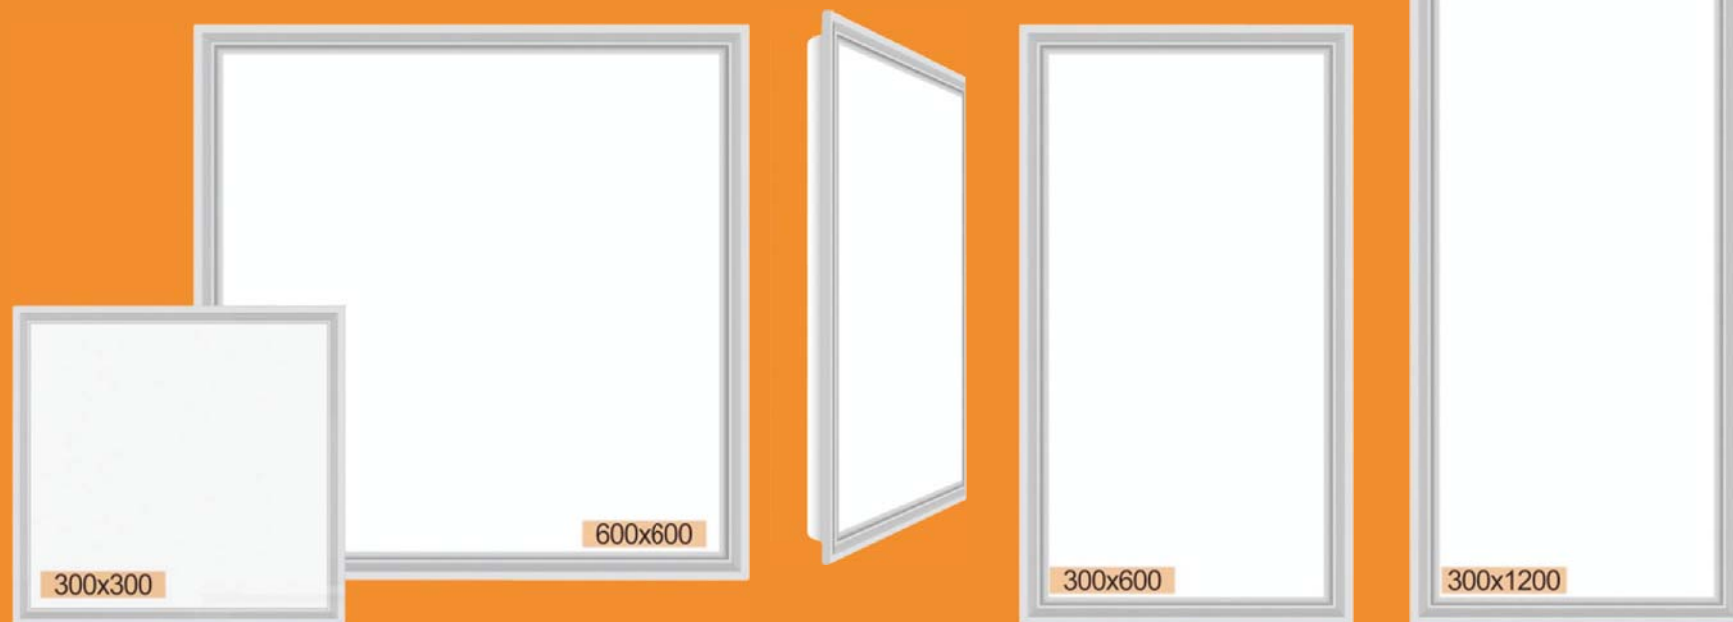

高PF 无频闪




Widegerm Lighting Ltd.

匯湛照明有限公司




Model No EB980-300x300
 Input Voltage (V) AC220V
 Frequency (Hz) 50/60Hz
 Power (W) SMD2835 20W
 Beam Angle 120°
 Light Flux: 90-110Lm/W
 Color Temperature 3000K, 4000K, 6000K
 Color Render Index ≥80




20W SMD2835 **300x300**

Diameter \square 300x300xH30mm
 Hole cut \square 280x280mm



Model No EB980-600x600
 Input Voltage (V) AC85-265V
 Frequency (Hz) 50/60Hz
 Power (W) SMD2835 48W
 Beam Angle 120°
 Light Flux: 90-110Lm/W
 Color Temperature 3000K, 4000K, 6000K
 Color Render Index ≥80

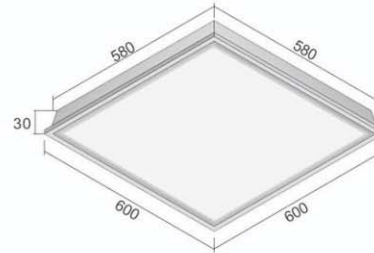


48W SMD2835 **600x600**

Diameter \square 600x600xH30mm
 Hole cut \square 580x580mm




Model No EB980-300x600
 Input Voltage (V) AC220V
 Frequency (Hz) 50/60Hz
 Power (W) SMD2835 30W
 Beam Angle 120°
 Light Flux: 90-110Lm/W
 Color Temperature 3000K, 4000K, 6000K
 Color Render Index ≥80

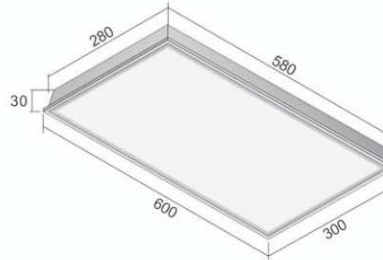


30W SMD2835 **300x600**

Diameter \square 300x600xH30mm
 Hole cut \square 280x580mm

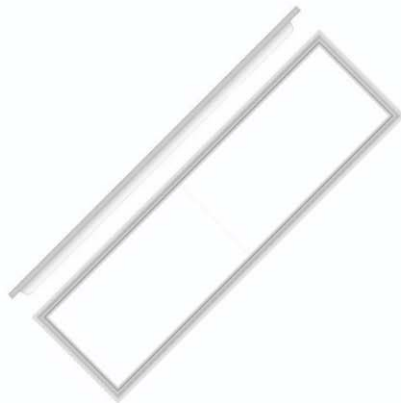

Model No EB980-300x1200
 Input Voltage (V) AC85-265V
 Frequency (Hz) 50/60Hz
 Power (W) SMD2835 49W
 Beam Angle 120°
 Light Flux: 90-110Lm/W
 Color Temperature 3000K, 4000K, 6000K
 Color Render Index ≥80

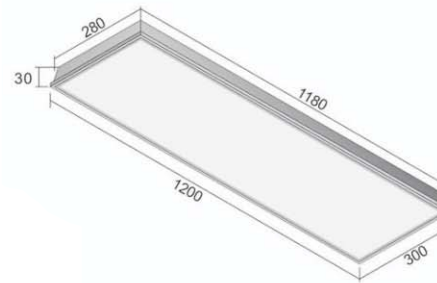

49W SMD2835 **300x1200**

Diameter \square 300x1200xH30mm
 Hole cut \square 280x1180mm